



DAV PUBLIC SCHOOL

MADHEPUR, PO+PS - MADHEPUR, MADHUBANI, BIHAR - 847408

Affiliated to CBSE, New Delhi (Aff. No. - 330469, School No. - 65481)

Mob. No. - 9263279597, 9534449442, 9102376670

Email : davpsmadhepur@rediffmail.com | Website : www.davpsmadhepur.in

DAV CMC SCHOOL CODE BR- 061

Ref. No. : DAV/ Madhepur/2026-27/193

Date : ..01/03/2026...

TENDER NOTICE

Sealed quotations are invited from reputed and experienced firm as per the following details:

Sl No	Particular
1	Name of work
2	Estimated Area
3	Time of Completion
4	Date of Tender Notification on School website
5	Last Date / Time for Receipt of Bids
6	Name and Address of Office Inviting tender
7	Contact no of Procurement Office

FOLLOWING POINTS NEED ATTENTION

1. The work should be executed as per approved specification.
2. Each interested firm will submit the two sealed quotations viz. financial bid and technical bid.
3. The extra items or supplementary items if any shall be executed after proper approval of the Principal.
4. The contractor will be fully responsible to maintain the best quality of materials, workmanship and completion of work within the estimated cost & time.
5. The rate quoted by contractor shall hold good up to finishing of the construction. No amendment will be accepted in the approved rate.
6. Payment will be made with mutual understanding after assessment of the constructed structure and its quality followed verification by the bills by the Architect and approval by the competent authorities.
7. After finalization of bid the work will be issued to the lowest bidder. Finalized bidder needs to start work within a fortnight from the date of issue of the work order.
8. All due formalities related to safety and security of the labours (as per Govt. Norms) is sole responsibility of the firm who will accept the work.

Principal
D.A.V Public School
Madhepur (Madhubani)
C.B.S.E. Aff. No. 3304
School No. 65481

Manager
D.A.V Public School
Madhepur, Madhubani

Asst Regional Officer
Asstt. Regional Officer
D.A.V Public School
Bihar Zone-G



॥ ओ३म् ॥

DAV PUBLIC SCHOOL

MADHEPUR, PO+PS - MADHEPUR, MADHUBANI, BIHAR - 847408

Affiliated to CBSE, New Delhi (Affl. No. - 330469, School No. - 65481)

Mob. No.- 9263279597, 9534449442, 9102376670

Email : davpsmadhepur@rediffmail.com | Website : www.davpsmadhepur.in
DAV CMC SCHOOL CODE BR- 061

Ref. No. : DAV/

Date :

TECHNICAL BID

PROJECT _____

DATE: ____/____/____

Sl No	Required Document	PARTY NAME & ADDRESS
1	PAN CARD NO	
2	TAN/VAT NO	
3	GST REG. NO	
4	Labour License No	
5	Registration Certificate	
6	Work Experience	
7	Detail of Plant and Machinery	
8	Details of technical staff	
9	Certificate from scheduled Bank	
10	Proof of Bank Account	
11	Present Bank Balance	
12	5 years Income Tax Return Certificate	
13	Audit Report/balance sheet	
14	Organisation details	
15	Partnership deeds	
17	Earnest Money	
18	Remarks	

archgroup

architects , engineers,
interior designeres

07(A),GANGA-A,VASTU VIHAR,PII-VI,AIIMS-1,NH-139,NAUBATPUR RD,BHUSAULA,PATNA-801505,BIHAR,M-9430001170
REF:-DAV-M/SB/RW/01/25-26

Date:- 15 FEB 2026

FOR TECHNICAL APPROVAL

**ABSTRACT OF COST OF MISCELLANEOUS REPAIR WORK FOR D.A.V. PUBLIC SCHOOL, MADHEPUR,
MADHUBANI, BIHAR.**

I.No.	S.O.R.	DESCRIPTION	Qty.	Unlt.	Rate	Amount
(1) MISCELLANEOUS REPAIR WORKS IN OLD BLOCK						
1	9.101	Providing and fixing alluminium hanging floor door stopper, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS 1868) transparent or dyed to required colour and shade with necessary screws etc. complete.				
	9.101.2	Twin rubber stopper.	20	No.		
2	14.5	Renewing glass panes, with putty and nails wherever necessary including racking out the old putty:				
	14.5.1	Float glass panes of thickness 4mm	32.00	Sqm		
3	9.5.2.2	Providing and fixing 30mm thick Kiln seasoned and chemically treated hollock wood paneled or paneled and glazed shutters for doors, windows, and clear story windows including ISI marked M.S. pressed butt hinges bright finished of required size with necessary screws excluding panelling which will be paid for separately, all complete as per direction of Engineer-in-charge.	9.82	Sqm		
		Note:-Alluminium sheet coating on inner surface of toilet door upto 4'-0" height shall be provided.				
4	9.57	Providing and fixing ISI marked oxidised M.S. pressed butt hinges with necessary screws etc. complete.				
	9.57.1	125x65x2.12 mm	21.00	Each		
5	14.85	Taking out existing wooden door shutter, repair by cutting painting etc. and refixing of repaired door shutter to existing door frames, including replacement of hinges with screws etc. as required, all complete as per the direction of the Engineer-in-charge.	2.00	Each		
6	11.38	Providing and laying Ceramic glazed floor tiles 300x300 mm (thickness to be specified by the manufacturer) of first quality conforming to IS:15622 of approved make in colours such shades except white, Ivory Grey, Fume Red, Brown laid on 20 mm thick cement mortar 1:4 (1 cement: 4 coarse sand) including pointing the joints with white cement and matching pigment etc. complete.	5.00	Sqm		
7	11.36	Providing and fixing first quality ceramic glazed				

Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.
		wall tiles confirming to IS 15622(Thickness to be specified by manufacturer) of approved make in all colours, shades except burgundy, bottle green, black of any size as approved by engineer in charge in skirting, risers of steps and dados over 12mm thick bed of cement mortar 1:3 (1 cement, 3 coarse sand) and jointed with grey cement slurry @ 3.3 Kg/sqm including pointing in white cement mixed with pigment of matching shade complete.	17.00	Sqm
8	18.49	Providing and fixing C.P. brass bib cock of approved quality confirming to IS:8931	40	Each
9	18.22	Providing and fixing C.P. brass shower rose with 15 or 20 mm inlet:	*	
	18.22.2	150 mm diameter	6	Each
10	17.7	Providing and fixing wash basin with C.I. brackets 15 mm C.P. brass pillar taps, 32 mm C.P. brass waste of standard pattern including painting of fittings and brackets, cutting and making good the walls wherever required:		
	17.7.7	White Vitreous china Flat back wash basin size 450x 300 mm with single 15 mm C.P. brass pillar tap.	4	Each
11	17.23	Providing and fixing white vitreous china flat back or wall corner type lipped front urinal basin of 430x260x 50 mm or 340x410x265 mm sizes respectively.	4	Each
12	17.19	Providing and fixing controlled flush, low level cistern made of vitreous china with all fittings complete.		
	17.19.1	10 litre (full flush) capacity- white	2	Each
13	17.28	Providing and fixing P.V.C. waste pipe for sink or wash basin including P.V.C. waste fittings complete.		
	17.28.2	Flexible pipe		
	17.28.2.2	40 mm dia	10	Each
14	10.12.1	Providing and fixing steel glazed doors, windows and ventilators of standard rolled steel sections, joints mitred and welded with 15x3 mm lugs 10cm long with steel lugs embedded in cement concrete blocks 15x10x10 cm of 1:3:6 (1 cement; 3 coarse sand; 6 graded stone aggregate 20 mm nominal size) or with wooden plugs and screws or rawl plugs and screws or with fixing clips or with bolts and nuts as required including providing and fixing of 4mm glass panes with glazing clips and special metal sash putty of approved make complete including applying a primer coat of approved steel primer, excluding the cost of		

S.No.	S.O.R.	DESCRIPTION	Qty.	Unit.
		metal beading and other fittings except necessary hinges or pivot as required.	4.15	Sqm
15	10.29	Providing and fixing bright finished peg stays 300 mm long of minimum weight 330 gms to side hung steel windows with necessary welding and machine screws etc. complete.	44.00	Each
16	MR	Providing and fixing mild steel handle window handle ISI marked dyed to required colour or shade, with necessary screws etc. complete.	44.00	Each
17	17.29	Providing and fixing 100 mm sand cast iron grating for gully trap.	9	Each
18	17.32	Providing and fixing mirror of superior glass (of approved quality) and of required shape and size with plastic moulded frame of approved make and shade with 6mm thick hard board backing:		
	17.32.2	Rectangular shape 453x357 mm.	9	No.
19	17.71	Providing and fixing PTMT liquid soap container 109 mm wide, 125mm high and 112mm distance from wall of standard shape with bracket of the same materials with snap fittings of approved quality and colour, weighing not less than 105 gms.	9	No.
20	17.73	Providing and fixing PTMT towel ring complete with brackets fixed to wooden cleats with CP brass screws with concealed fittings arrangement of approved quality and colour.		
	17.73.1	450 mm long towel rail with total length of 495 mm, 78 mm wide and effective height of 88 mm, weighing not less than 170 gms.	9	No.
21	12.78	Providing and fixing on wall face unplasticised-PVC (working pressure 4 kgf per sqm) rain water pipes, soil, waste and vent pipe conforming to IS:4985 including jointing with seal ring conforming to IS:5382 leaving 10 mm gap for thermal expansion.		
	17.78.1	75 mm diameter	25	RM
	17.78.2	110 mm diameter	25	RM
22	12.79	Providing and fixing on wall face unplasticised-PVC molded fittings/accessories for unplasticised-PVC rain water pipe, soil, waste and vent pipes conforming to (IS:4985 including jointing with seal ring conforming to IS: 5382 leaving 10 mm gap for thermal expansion)		
	12.79.1	Coupler		
	12.79.1.1	75 mm	6	Each
	12.79.1.2	110 mm	6	Each
	12.79.4	Single tee without door		
	12.79.4.1	75x75x75 mm	2	Each

Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.
	12.79.4.2	110x110x110 mm	2	Each
	12.79.3	Single tee with door		
	12.79.3.1	75x75x75 mm	6	Each
	12.79.3.2	110x110x110 mm	6	Each
	12.79.5	Band 87.5*		
	12.79.5.1	75 mm bend	2	Each
	12.79.5.2	110 mm bend	2	Each
23	12.80	Providing and fixing unplasticised-PVC pipe clip of approved design to unplasticised-PVC rain water pipe soil, waste and vent pipe by means of 50x50x50 mm hard wood plug screwed with M.S.screws of required length including cutting brick work and fixing on cement mortar 1:4 (1 cement : 4 coarse sand) and making good the wall etc. complete.		
	12.80.1	75 mm	22	Each
	12.80.2	110 mm	22	Each
24	MR	Miscellaneous expences during renovation;dismantling, controll of seepage of bath rooms etc. complete as per direction of Engineer-in-Charge.	LS	
		TOTAL		
25		Add 15% extra for external and internal PHE work, external and internal electrical works		
		TOTAL		
		ROUNDING OFF		

Note:- All repair items are to be done with new required fittings of old block. Toilets outer pipes are changed and corrected fully.

archgroup

architects , engineers,
interior designers


507(A), GANGA-A, VASTU VIHAR, PH-VI, AIIMS-1, NH-139, NAUBATPUR RD, BHUSAULA, PATNA-801505, BIHAR, M-9430001170
REF:-DAV-M/SB/IT/01/26-27

Date:- 10 MAY. 2026

ABSTRACT OF COST OF TERRACE TREATMENT OF BLOCK-1, PH-I OF D.A.V. MADHEPUR, MADHUBANI, BIHAR.				
Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.
		(A) TERRACE TREATMENT OF BLOCK-1, PH-I		
		Area of Terrace = 4578.39 Sft. (425.50 Sqm); Area of gola = 309.08 Sft (28.72 Sqm)		
		Over all thickness of treatment = 3.5" (4.5" at centre To 2.5" at end)		
		SECTION -I (ROOFING WORK)		
1	12.52	Grading roof for water proofing treatment with		
	12.52.2	Cement concrete 1:2:4 (1 cement: 2 coarse sand: 4 graded stone aggregate 20 mm nominal size)	37.84	Cum
2	12.38	Providing gola 75x75 mm in cement concrete 1:2:4 (1 cement: 2 coarse sand: 4 stone aggregate 10 mm and down gauge) including finishing with cement mortar 1:3 (1 cement; 3 coarse sand) as per standard design.		
	12.38.1	In 75x75 mm deep chase	28.72	Sqm
3	4.12	Extra for providing and mixing water proofing material in cement concrete work in the proportion recommended by the manufacturer.	226	per 50kg cem.
4	12.39	Making khurras 45x45 cm with average minimum thickness of 5 cm concrete 1:2:4 (1 cement: 2 coarse sand; 4 graded stone aggregate 20 mm nominal size) over P.V.C. sheet 1 mx1 mx400 micron, finished 12mm cement plaster 1:3 (1 cement; 3 coarse sand) and a coat of neat cement rounding the edges and making and finishing the outlet complete.	18	Each
5	LS	Hacking of cement concrete flooring including cleaning for surface etc. complete as per direction of the Engineer-in-charge and disposal of waste.	425.50	
		TOTAL		
		ROUNDUP		
		Cost of construction per sq ft.		

NOTE:-

1. P.C.C. 1:2:4 MIXED WITH WATER PROOFING CEMENT, CASTING IN SLOPE FROM 4" AT CENTER TO 3" AT OUTER EDGE.
2. HACKING AND CLEANING OF TERRACE WILL BE MADE BEFORE P.C.C. CASTING.
3. 75X75 MM GOLA WILL BE MADE ALL ROUND THE WALL IN C.C. 1:2:4 FINISHED WITH C.M. 1:3.
4. KHURAS OF 45X45 CM WITH C.C. 1:2:4 OVER 400 MICRON PVC SHEET FINISHED WITH C.M. 1:3 AND NEAT CEMENT PUNNING.

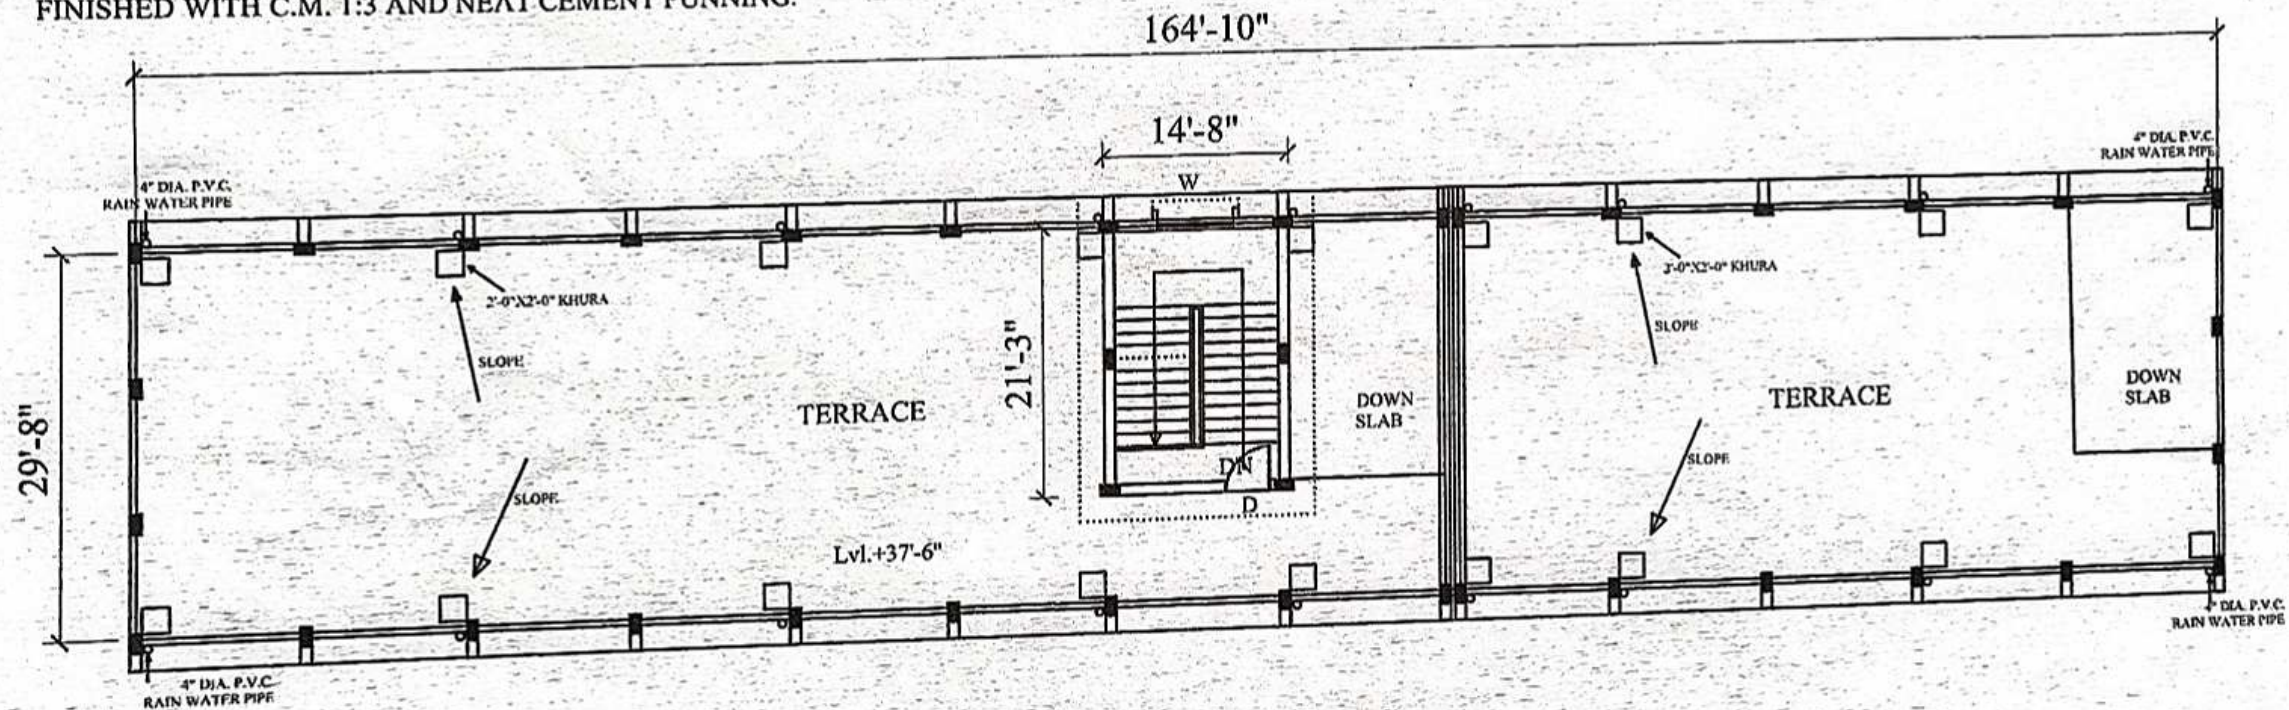

AREA OF ROOF SLAB = 4578.39 SFT.

NOTE:-
DOWN SLAB & SIDE OF WALLS WILL BE MADE
WATER PROOFING AND PROPERLY DRAINED.

PROJECT

DRG.NO.-1



DATE
MAY.-26

archgroup
architects, engineers,
interior designers,
507(A), VASTU VIHAR, PH-6,
AIIMS-1, NH-139, NAUBATPUR
ROAD, BHUSAUNA, DANAPUR

TITLE

ROOF PLAN

PHASE 1 OF D.A.V.P. SCHOOL,

archgrouparchitects , engineers,
interior designers

507(A), GANGA-A, VASTU VIHAR, PH-VI, AIIMS-1, NH-139, NAUBATPUR RD, BHUSAULA, PATNA-801505, BIHAR, M-9430001170


REF:- DAV-MP/SB/GW/01/25-26

Date:- 12 FEB. 2026

FOR TECHNICAL APPROVAL**ABSTRACT OF COST OF GRILL WORK FOR D.A.V. PUBLIC SCHOOL, MADHEPUR, MADHUBANI, BIHAR.**

Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.
(1) GRILL WORK AT 1ST & 2ND FLOOR OF BLOCK-1				
Area of Grill work at 2nd & 1st floor of Block-1 = (5'-1"X5'-11"+9'-3"X5'-11"+8'-10"X5'-11"+2X8'-10"X6'+8'-10"X5'-11"+9'-2"X5'-11"+10'-4"X5'-8"+8'-11"X5'-8"+8'-9"X5'-8"+8'-11"X5'-8"+5'-2"X5'-7")+(4'-10"X5'-5"+9'-7"X5'-5"+9'-0"X5'-5"+8'-11"X5'-5"+8'-11"X5'-6"+8'-11"X5'-5"+9'-5"X5'-6"+10'-5"X5'-6"+3'-3"X3'-3"+8'-4"X5'-6"+9'-0"X5'-6"+9'-0"X5'-8"+5'-3"X5'-3") = 587.70+566.23 Sft.=1153.93 Sft.(107.24 Sqm)				
SECTION-I (CARPENTRY, STEEL, HARDWARE)				
1	9.48	Providing and fixing M.S.grills of required pattern in frames of windows etc.with M.S. flats, square or round bars etc. including priming coat with approved steel primer all complete.		
	9.48.2	Fixed to openings/wooden frames with rawl plugs screws etc.	1730.90	Kg
2	13.82	Painting with ready mixed paint of approved brand and manufacture in all shades to give an even shade.		
	13.82.1	New steel work (Two or more coats.)	107.24	Sqm
3	MR	Providing and fixing fastener for fixing of grill in openings in R.C.C. and wall.	220	No
TOTAL				
ROUND UP				
Cost of fixing grill/sft				

PLEASE MEASURE THE ALL OPENING SIZE AT SITE BEFORE MAKING GRILL. ALL GRILLS WILL BE WITH FASTENERS.

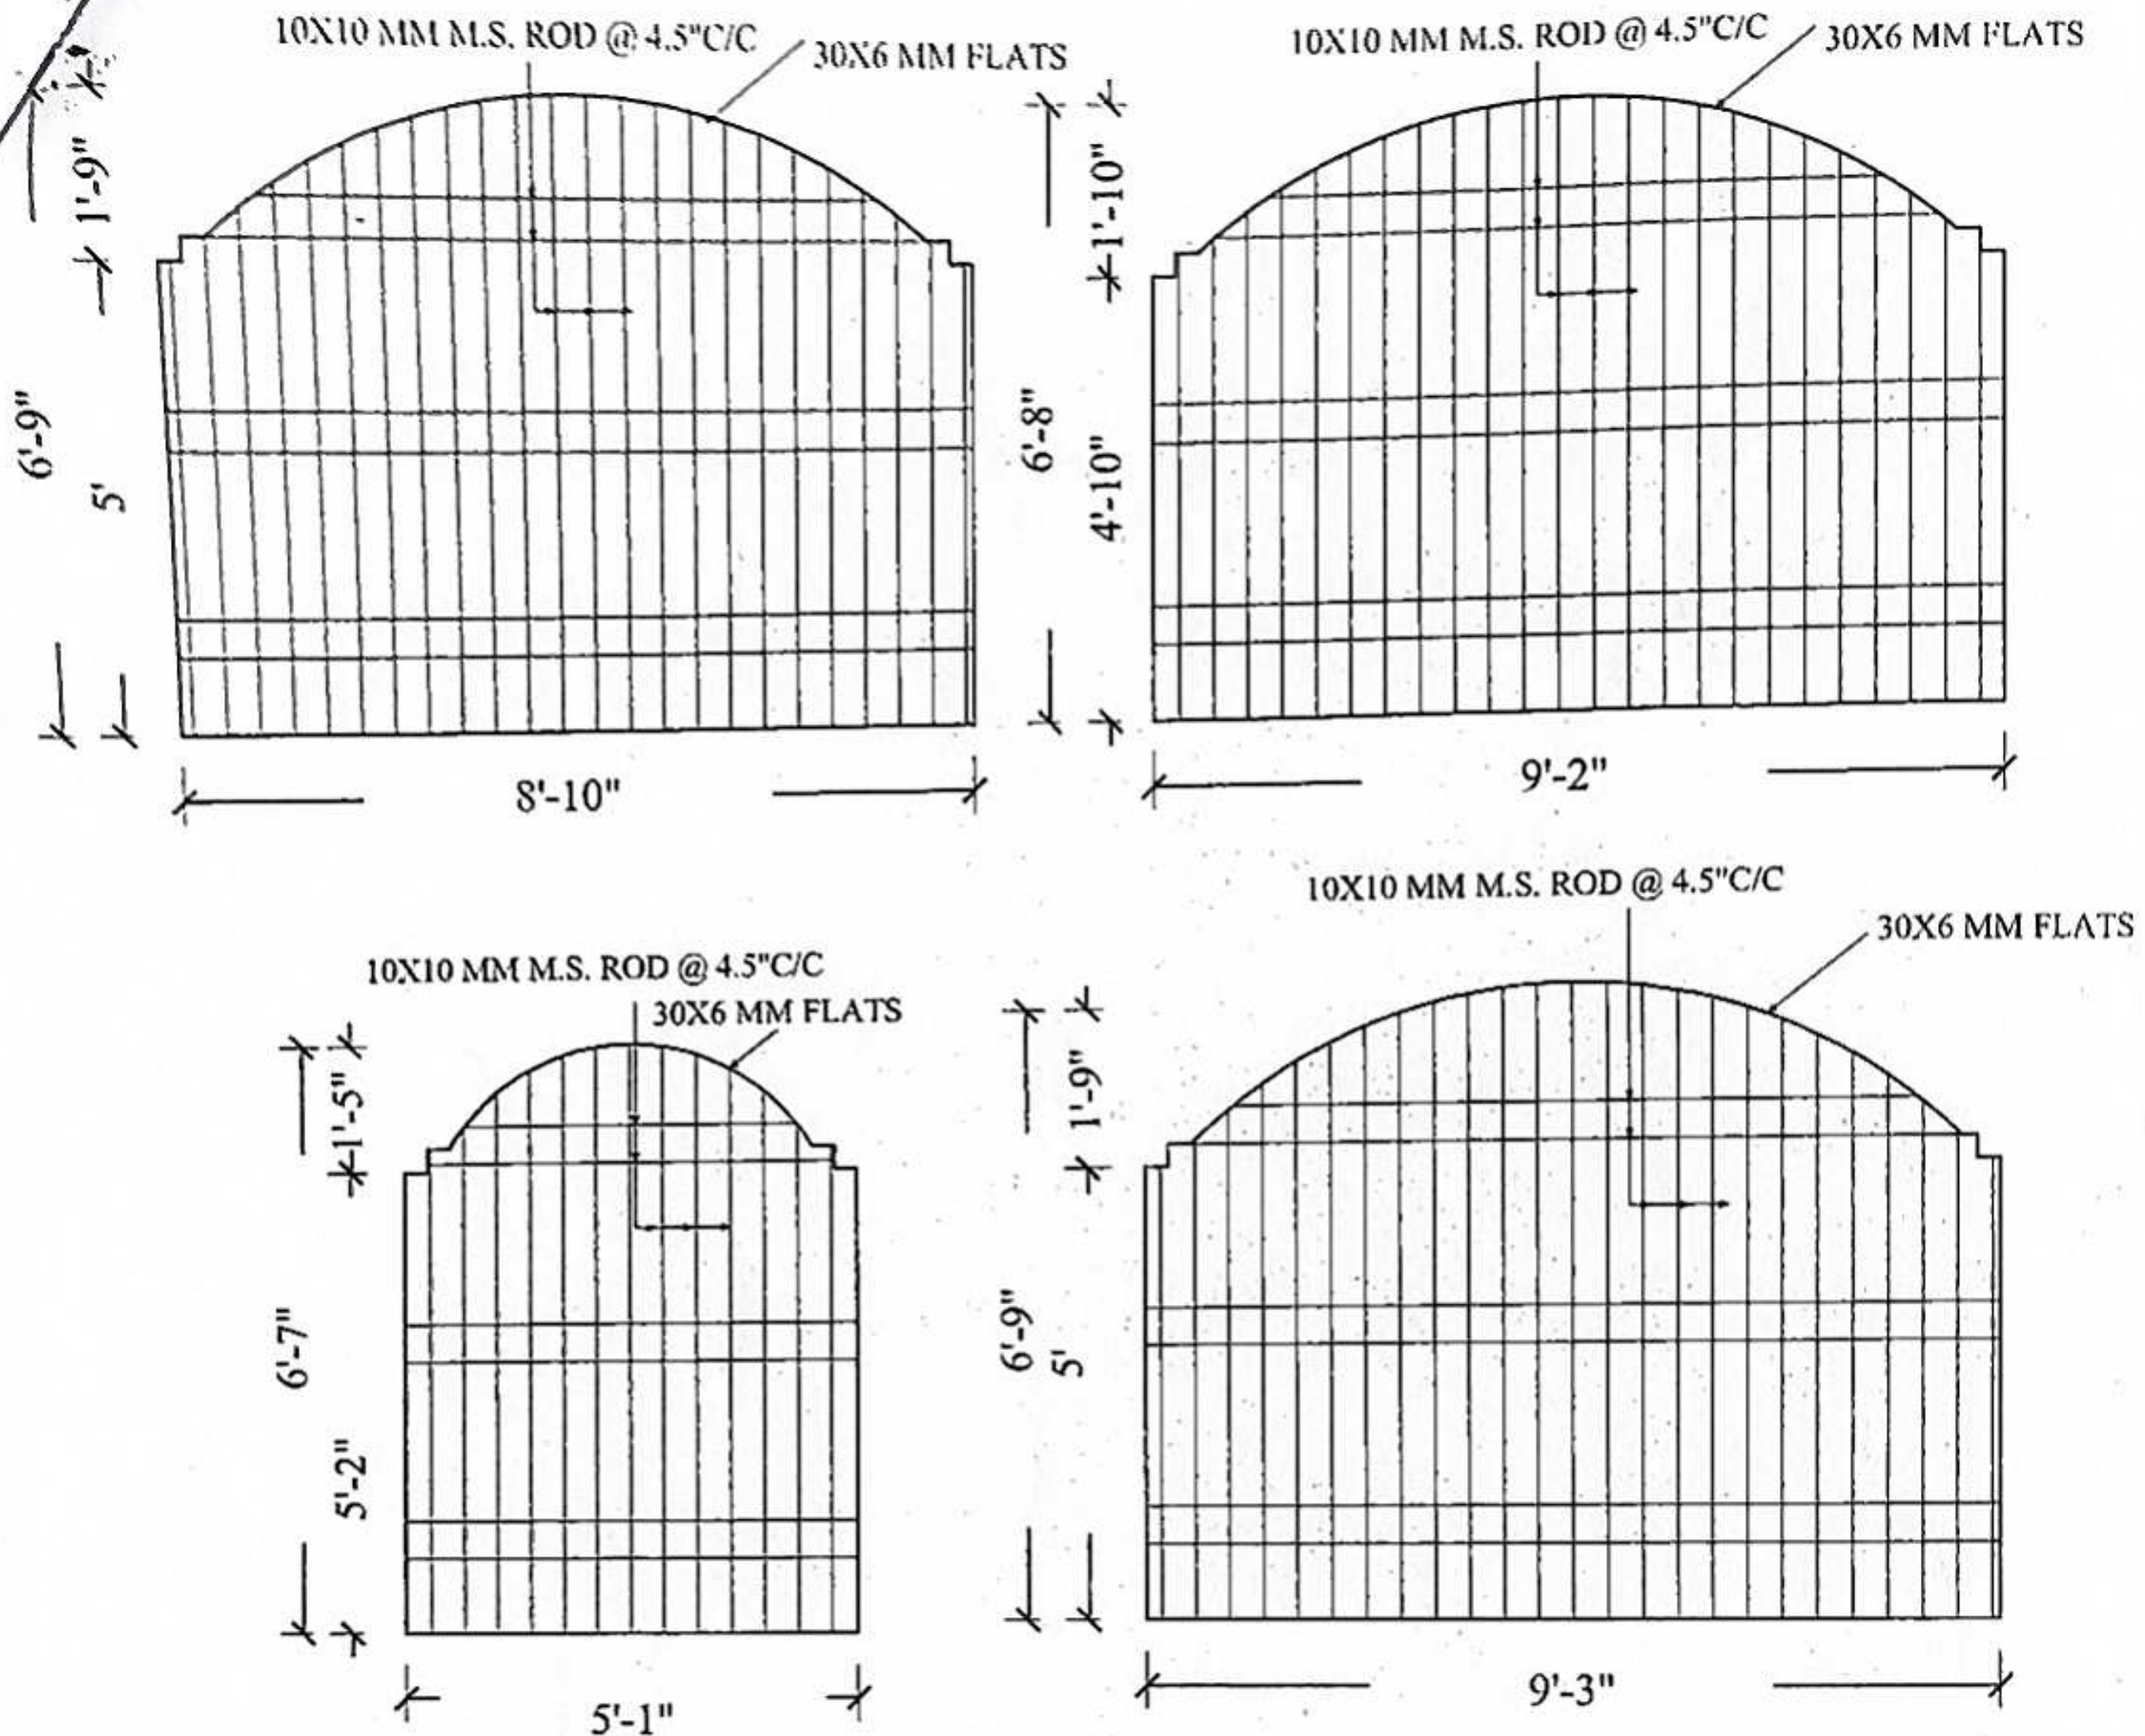

VERANDAH GRILL DETAILS (TYPICAL)

PROJECT
PROPOSED GRILL WORK IN BLOCK-1 OF D.A.V. P. SCHOOL,
MADHEPUR, MADHUBANI, BIHAR.

SHEET. NO.-1

DATE

FEB.-26

TITLE
1ST & 2ND FLOOR GRILL DETAILS

archgroup

architects, engineers,
interior designers,
507(A), Vastu Vihar, Ph-6,
AIIMS-1, NH-139, Naubatpur
Road, Bhusaula, Danpur, Patna,
Bihar. Ph. 0073550040